

YOU GOT THE  
POWER.



## AIRPORT TECHNOLOGIES

**D POWER**

Diesel Driven Ground Power Unit



 **HITZINGER**<sup>®</sup>  
A Member of Dr. Aichhorn Group

## D POWER

# DIESEL DRIVEN GROUND POWER UNIT

With its **D POWER**, Hitzinger presents a state-of-the-art ground power generation for aircrafts during the flight preparation phase. The improved efficiency and reduced total costs of operation as well as the increased eco friendliness and usability make the **D POWER** the most innovative ground power unit for demanding long-term operations.



### AVAILABLE APPLICATIONS

- Towable application
- Motorised application
- Application for aircraft tow tractors

### POWER RANGE

- D POWER 90 to 180 kVA

### TECHNICAL DATA

- Voltage: 200/115 VAC
- Frequency: 400 Hz

### ENVIRONMENT

- Ambient temperature:
  - 30° C to +52° C
- Relative humidity
  - up to 95 %
- Noise level:
  - < 75 dB (A) @ 1m

### OPTIONS

- 28 VDC unit for single or simultaneous operation
  - permanent load: 600 A
  - maximum load: 2500 A
- Modified protective separation (IT) according to DFS 400
- Individual customization on request

### STANDARDS

- ISO 6858 version 2
- SAE ARP 5015
- DFS 400
- BS 2G 219
- MIL-STD 704
- EN 2282
- EN 61439
- EN 1915-1/-2
- EN 12312-20
- EN 61000-6-4

# GUARANTEED POWER

The **D POWER** distinguishes itself through optimized economic and alternator efficiency. Minimized maintenance costs, convenient serviceability and easy operation complete the product's consistent development strategy. We guarantee optimal power.



## MAXIMUM EFFICIENCY

The reduction of rotations per minute to 1500 results in significantly lower fuel consumption. Hence, the D POWER increases its commercial efficiency. Additionally, maintenance costs are minimized and the noise level is decreased as much as possible.



## INCREASED EFFICIENCY

Due to the increased alternator efficiency and independent from the load profile, aircraft may also be powered as economically as possible during turn-around.



## BEST SERVICEABILITY

The modular design of the control unit simplifies all service works. Spaciously designed side panels enable optimized access.



## USERFRIENDLY CONTROLS




The touch panel of the controller distinguishes itself via intuitive user guidance. It is easily readable, even in direct sunlight, water and dust proof, and suitable for adverse airfield conditions. Moreover, the resistant touch screen can be operated conveniently with working gloves.

# SIMPLY BRILLIANT

Economic efficiency, safety, and maximum flexibility are the main focus of our development strategy. We evaluate the power of innovation according to the benefit it provides for our customer. "More power for less investment and optimal handling" is our ethos.

## ECONOMIC GROUND POWER

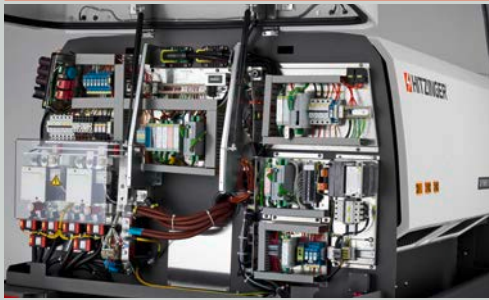

### INNOVATIVE TECHNOLOGY

- engine speed: 1500 rpm
- lowest noise level
- lowest maintenance costs
- lowest emissions
- light-weight design
- robust chassis
- equal track width of the front and rear suspension results in:
  - stable driving conditions
  - smallest turning radius/circle

### SIMPLIFIED MAINTENANCE

- modular control unit
- outstanding access for serviceability and maintenance (from 4 sides)
- perfect access to maintenance-free absorbent glass mat batteries
- solid rubber tires

### MONITORING SYSTEM

- easy operation via intuitive menu guidance
- clearly laid-out and easy to use operating data
- user mode for operation & service (user and expert mode)
- easy operation

### ECONOMIC EFFICIENCY

- lowest fuel consumption
- extended life cycle
- less wear and tear of major components

### SAFETY

- lighting system enables diverse operating states to be indicated optically (LED)
- easy to read error log
- drive-away lock if plug is not in the defined position

### ERGONOMICS

- The operating panel is well positioned as well as the aircraft supply cable for safe and swift handling.
- spaciouly designed cable tray
- defined position for aircraft supply cables as protection against harsh weather conditions

## TECHNICAL SPECIFICATIONS


### GENERAL TECHNICAL SPECIFICATIONS

Nominal power:	90/120/140/180 kVA
Power factor:	0.8 to unity
Voltage:	200/115 V 3-phase + neutral
Frequency:	400 Hz
Protection according to DIN 40050:	IP 55 400 Hz control unit
Overload characteristics:	110 % for 60 min, 125 % for 5 min


### TECHNICAL DATA DIESEL ENGINE

Make:	DEUTZ TCD 2013, TCD 6.1, TCD 7.8, water-cooled CUMMINS QSB5, QSB7, water-cooled
Exhaust emission level:	EU COM IIIA / EU Stage V / US EPA Tier 4 final
Engine speed:	1500 rpm
Engine electrics:	24 VDC
Diesel engine operation:	4-stroke in-line engine, common rail system


### PERFORMANCE

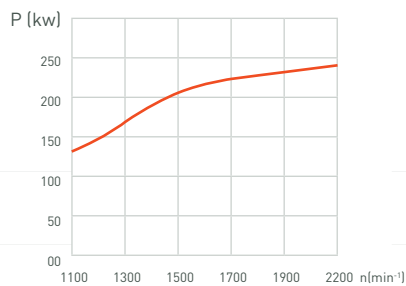

### TORQUE

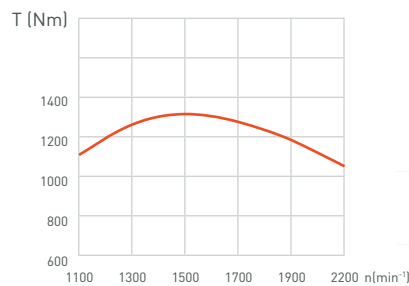

### CONSUMPTION

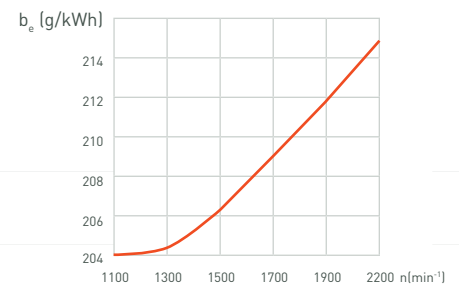


### TECHNICAL DATA ALTERNATOR

Make:	HITZINGER SGE050C32K
Efficiency:	92 %
Model:	32 pole, self-controlled 3-phase internal pole synchronous alternator

### WEIGHTS AND DIMENSIONS

Model	Weight (kg)	Dimensions (H x W x L) (mm)
D POWER 90	~2800 kg	1792 x 1540 x 3970 mm (H x W x L)
D POWER 120	~2800 kg	1792 x 1540 x 3970 mm (H x W x L)
D POWER 140	~2900 kg	1792 x 1540 x 3970 mm (H x W x L)
D POWER 180	~2900 kg	1792 x 1540 x 3970 mm (H x W x L)

### MEASUREMENTS

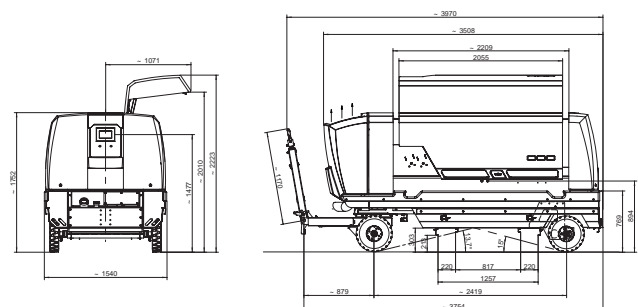

FOR OVER 70 YEARS, QUALITY, EFFICIENCY, AND DURABILITY HAVE BEEN THE FOUNDATIONS OF OUR SUCCESS. COUNTLESS INDUSTRIES THROUGHOUT THE WORLD PLACE THEIR TRUST IN US TO PROTECT AND POWER THEIR BUSINESSES AT EVERY MOMENT OF EVERY DAY. AS A WORLD LEADER IN TAILOR-MADE POWER SOLUTIONS, WE ARE YOUR PARTNER FOR INNOVATION, VALUE AND SERVICE. WE ENSURE THAT YOU'VE GOT THE POWER.

**POWER. ANYTIME. ANYWHERE.**



**HITZINGER GmbH**  
Helmholtzstraße 56  
4021 Linz, P.O. Box 5000  
Austria

Phone: +43 732 381681-0  
Fax: +43 732 381681-4  
Mail: office@hitzinger.at  
Internet: www.hitzinger.at

**HITZINGER (UK) Ltd.**  
50 Churchill Square  
Kings Hill, West Malling,  
KENT, ME 19 4YU  
United Kingdom

Phone: +44 1732 529 641  
Fax: +44 1732 529 642  
Mail: info@hitzinger.net  
Internet: www.hitzinger.net

**HITZINGER Pte Ltd.**  
3 Loyang Way 4  
506956 Singapore  
Singapore

Phone: +65 31100042  
Fax: +65 62141217  
Mail: singapore@hitzinger.at  
Internet: www.hitzinger.at

**HITZINGER USA**  
11764 Marco Beach Drive, Suite 4-6  
Jacksonville, Florida, 32224

Phone: +1 904 330 0267  
Mobile: +1 904 518 9635  
Fax: +1 904 575 4974  
Mail: sales@hitzinger.us  
Internet: www.hitzinger.us

VAT Identification No. ATU22982002  
ARA License No. 5563  
Data Processing Registration No. 484121  
Commercial Register No. 83220h

